





THC08

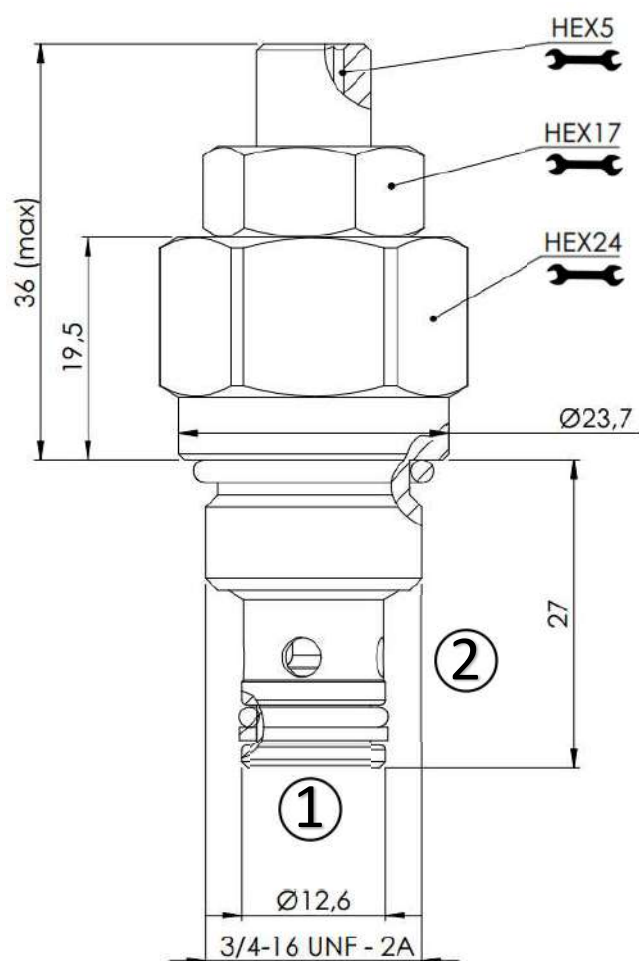


(mm)

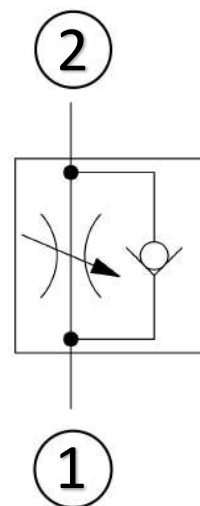

Description

Throttle valves are a type of flow control valve. This valve allows free flow from port 1 to port 2 and increases its orifice size from fully closed to fully open with counterclockwise rotation from port 2 to port 1. All external parts zinc plated.

SPECIFICATIONS

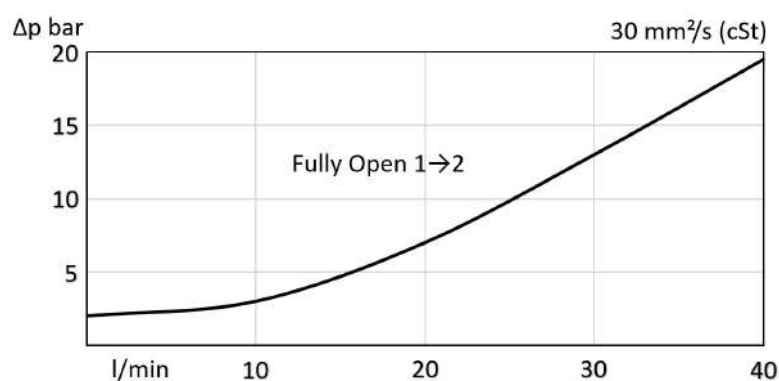

Maximum Operating Pressure	350 bar
Rated Flow	40 lpm
Cavity	SAE08-20
Cleanliness Class (ISO 4406)	21/18/15...19/17/13
Viscosity Range	10 ... 500 mm²/s (cSt)
Temperature Range (fluid)	-25 ... +80°C
Tightening torque	50 Nm (± 5 %)

Ordering Code

