




TH08

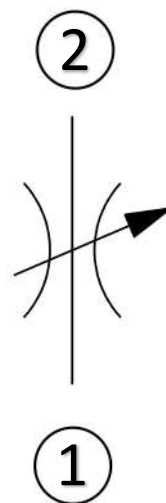



Description

Needle valves are a type of flow control valve. This valve increase its orifice size from fully closed to fully open with counterclockwise rotation. All external parts zinc plated.

SPECIFICATIONS

Maximum Operating Pressure	350 bar
Rated Flow	40 lpm
Cavity	SAE08-20
Cleanliness Class (ISO 4406)	21/18/15...19/17/13
Viscosity Range	10 ... 500 mm²/s (cSt)
Temperature Range (fluid)	-25 ... +80°C
Tightening torque	50 Nm (± 5 %)

(mm)

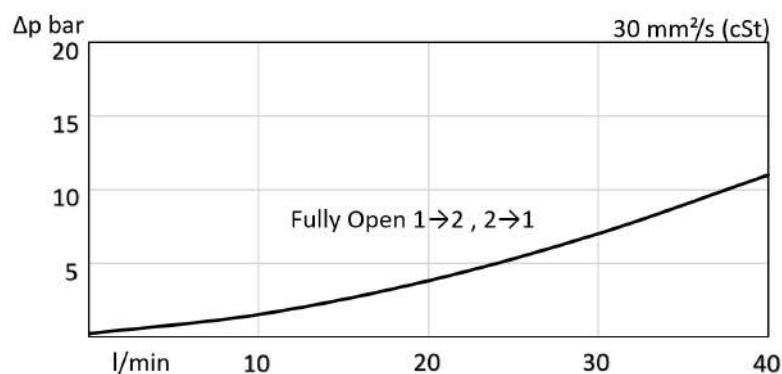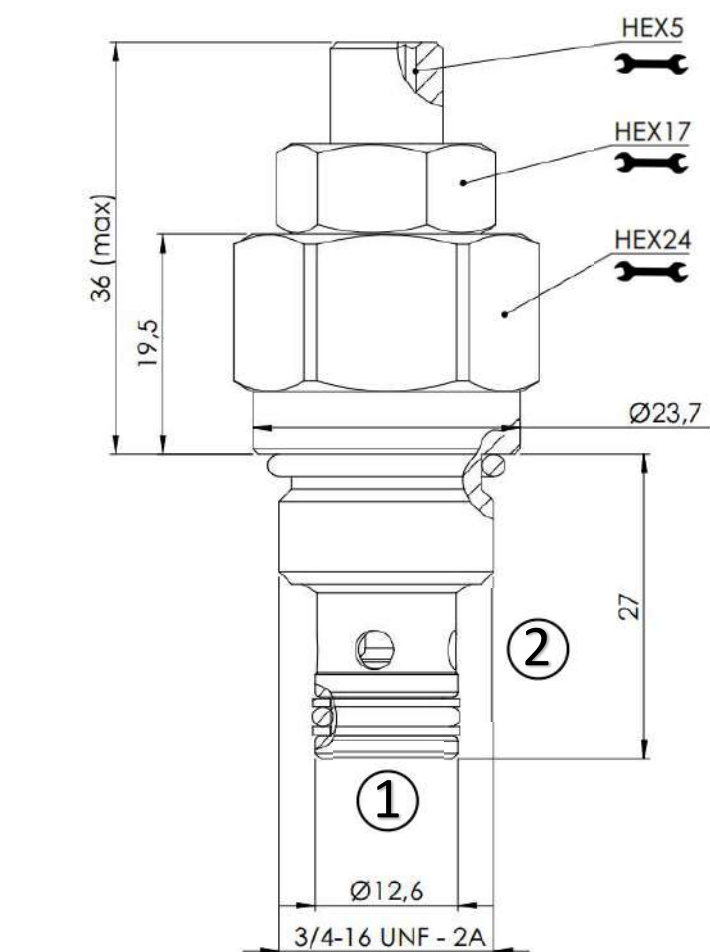

Ordering Code

