




CV12




(mm)

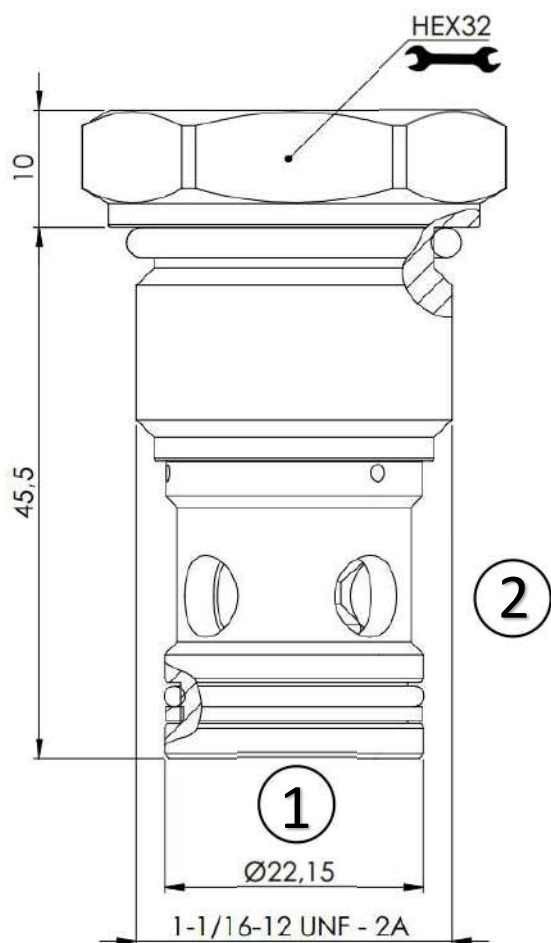

Description

Check valve is a type of one-way non-return valve. This valve allows free flow from port 1 to port 2 and blocks flow from port 2 to port 1 and holding a load. All external parts zinc plated.

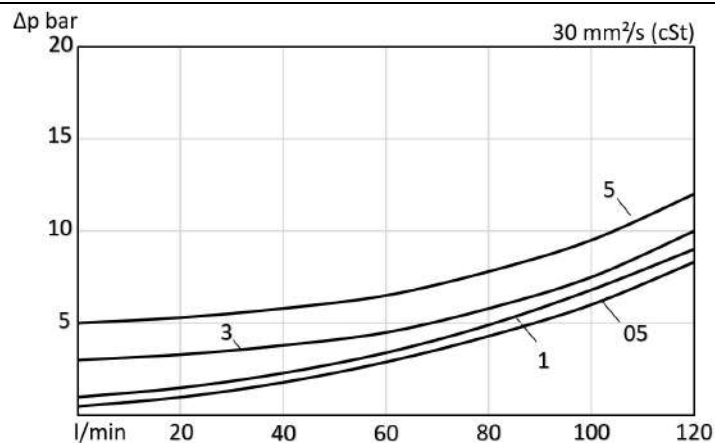

SPECIFICATIONS

Maximum Operating Pressure	350 bar
Rated Flow	120 lpm
Cavity	SAE12-20
Cleanliness Class (ISO 4406)	21/18/15...19/17/13
Viscosity Range	10 ... 500 mm²/s (cSt)
Temperature Range (fluid)	-25 ... +80°C
Tightening torque	125 Nm (± 5 %)

Ordering Code

